

NEW

The TDH30 Series Low Cost OEM Pressure Transducer



SERIES: TDH30



APPLICATIONS

- Hydraulic / Mobile Hydraulic
- Pneumatic Systems
- Food and Beverage Industry
- Refrigeration Systems
- Pumps and Compressors
- Energy and water management
- Construction and Agricultural Equipment

DESCRIPTION

The TDH30 Series Pressure Transducer utilizes piezoresistance technology in an all stainless steel body. It is compact in size, has long term stability, ease of installation and is very economical as well as reliable.


The TDH30 sets a new price-performance standard for low cost, high volume commercial and industrial applications.

FEATURES


- 3 to 10,000 psi Range
- Various Outputs
- Compact Design
- 316 Stainless steel Housing
- Low Cost
- Industrial 1% Accuracy
- Custom Outputs and Ranges Available
- OEM Tested and Approved
- Low power consumption

ELECTRICAL CONNECTIONS

Signal	Function	Color	Pin	Electrical Connector DIN 4 pin (9.4)
0-5V	Supply V + Com Output N/A	Red Black White N/A	1 2 3 4	
4-20mA	Supply V Output	Red Black	1 2	
Signal	Function	Color	Pin	3 pin Packard
0-5V	Com Supply + Output +	Black Red White	A B C	
4-20mA	Output Supply +	Black Red	A B	

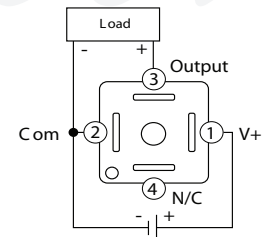

0-5VDC Output

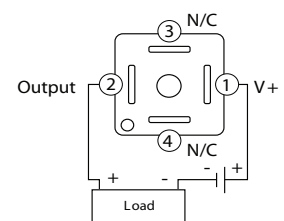

4-20mA Output

SPECIFICATIONS

Input

Supply Voltage	12-36 VDC
Pressure Range	3 to 10,000 psi
Proof Pressure	1.5 x full scale
Burst Pressure	3 x full scale
Fatigue Life	More than 4 million cycles

Performance @ 25° C (77° F)

Accuracy	1% full scale, BFSL
Stability	0.2% full scale
Compensated Temperatures	-10 to 75 ° C (14 to 167 ° F)
Operating Temperatures	-20 to 80 ° C (-4 to 176 ° F)
Zero and Span Offset Tolerance	1.5%
Current Consumption	Approx 3mA for voltage output, 22mA for current output (4-20mA)
Shock	50g, 11ms, 1/2 sine
Vibration	11g peak From 10 to 400Hz

Mechanical Configuration

Pressure Port	1/4 NPT (standard) *
Electrical Connection	9.4 mini DIN, 3 pin Packard *
Ingress Rating	IP65 with T-Direct standard 9.4 DIN cable, IP66 with T-Direct standard Packard cable
Housing	316 stainless steel
Diaphragm Material	3-75psi = 316 SS, >75-1600psi = ceramic, >1600-10,000 = 17-4 SS 316SS is available instead of ceramic upon request

Sealing Material Neoprene



Approvals CE

For best performance use shielded cables

Mating connectors and cable assemblies sold separately

* = Consult factory for further OEM options

Dimensions

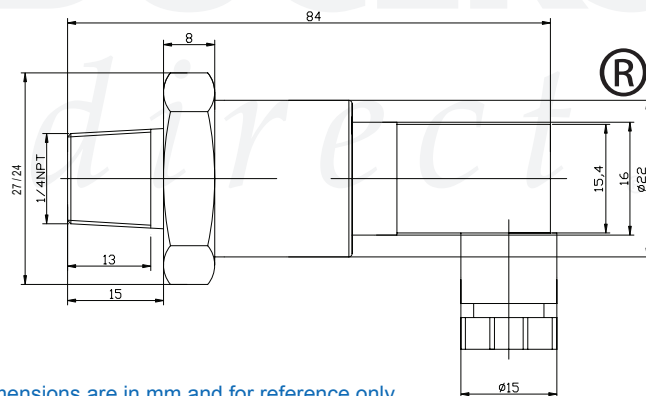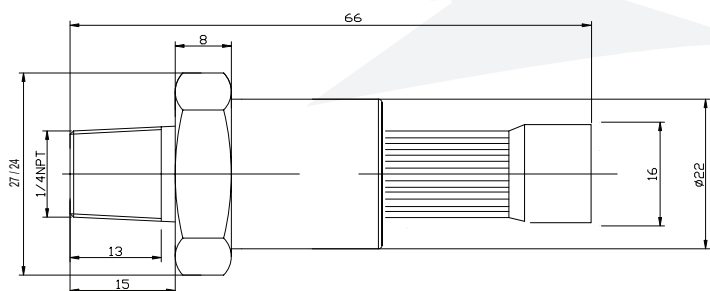

Dimensions are in mm and for reference only

ORDERING

Series	Output	Pressure Type	Pressure Range	Pressure Port	Electrical Connection	Accuracy
TDH30	B	G	0500 psi	03	D00	4
	B= 4-20mA C= 0-5V (3 wire) **	G = Gauge	0015 0250 0025 0500 0050 1000 0100 3000 5000	03= 1/4" NPT Male **	D00= 4 pin Mini 9.4 DIN B00= 3 pin Packard **	4= 1% **

**= Consult factory for further OEM options

Pressure ranges and outputs listed above are quick ship versions

isweek www.isweek.cn

公司名: 深圳市工采网络科技有限公司

电话: + 86-755-83289069

地址: 广东省深圳市南山区高新南一道中国科技开发院3号楼16层

传真: + 86-755-83289052

邮箱: sales@isweek.cn