

Sensors for pH Measurement

Chem

Energy

Pharm

Food

Water

MEMOSENS



SE 557 Memosens pH Sensor

For special requirements and high-precision measurements with refillable liquid electrolyte, digital, with Memosens technology

Elimination of typical junction problems resulting in high measurement accuracy in ultrapure water as well as in heavily polluted media and at high temperatures. Integrated, refillable liquid electrolyte reservoir. 2 ceramic junctions, self cleaning due to pressurization (continuous outflow of electrolyte). Silver ion trap prevents junction fouling and contamination.

Applications

Boiler feed water, water for injection (WFI), semiconductor production, media containing proteins or sulfides, difficult process media requiring high measurement stability


Facts

- Perfect galvanic isolation thanks to Memosens technology
- No influence of humidity in the connector
- Precalibration in the lab
- Digital data transfer
- Integrated sensor diagnostics
- High accuracy
- Extensive measuring range for pH and temperature
- Refillable liquid electrolyte
- 2 ceramic junctions
- Self cleaning due to pressurization
- Silver ion trap
- Integrated temperature detector
- CIP- and SIP-capable

Specifications

pH:	0 ... 14
Temperature:	-20 ... 80 (135 °C NMSH)
Pressure:	0 to 6 bars
Temperature detector:	NTC 30 kohms
Sensor material:	Highly alkali-resistant glass
Reference system:	Ag/AgCl with silver ion trap, liquid electrolyte
Electrolyte:	Friscolyt-B ZU 0591
Junction:	Ceramic (2 x)
Immersion depth:	120 mm / 250 mm
Sensor cap:	Memosens
ATEX Certificate:	II 1G Ex ia IIC T3/T4/T6

Dimension Drawing

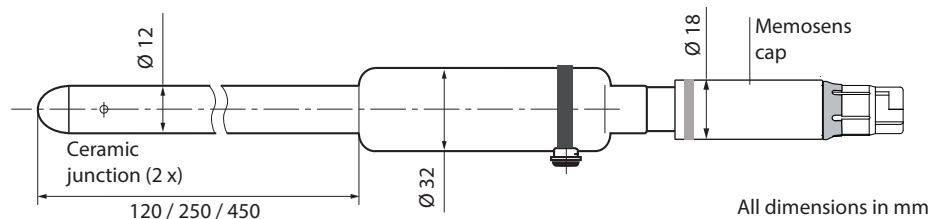

Product Range	Length	Order No.
SE 557 pH sensor	120 mm	SE 557X/1-NMSN
	250 mm	SE 557X/2-NMSN
	450 mm	SE 557X/4-NMSN
SE 557 pH sensor (hygienic)	120 mm	SE 557X/1-NMSH
	250 mm	SE 557X/2-NMSH
Accessories	Length	Order No.
Memosens cable	3 m	CA/MS-003NAA
	5 m	CA/MS-005NAA
	10 m	CA/MS-010NAA
	20 m*)	CA/MS-020NAA
Memosens cable, Ex	3 m	CA/MS-003XAA
	5 m	CA/MS-005XAA
	10 m	CA/MS-010XAA
	20 m*)	CA/MS-020XAA
Buffer Solutions (20 °C)	Quantity	Order No.
pH value 2.00 ± 0.02	250 ml	CS-P0200/250
	250 ml	CS-P0400/250
	1000 ml	CS-P0400/1000
pH value 4.00 ± 0.02	3000 ml	CS-P0400/1000
	250 ml	CS-P0700/250
	1000 ml	CS-P0700/1000
pH value 7.00 ± 0.02	3000 ml	CS-P0700/1000
	250 ml	CS-P0900/250
pH value 9.00 ± 0.02	1000 ml	CS-P0900/1000
	3000 ml	CS-P0900/1000
	250 ml	CS-P1200/250
pH value 12.00 ± 0.05	250 ml	CS-P1200/250
Electrolyte (Friscolyt-B)	250 ml	ZU 0591
MemoSuite		Order No.
Management software for Memosens sensors	Basic version (calibration)	SW-MS1400-B
	Advanced version (calibration, diagnostics, documentation)	SW-MS1400-A